

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



NOTED FOR PUBLICATION BY THE INTERNATIONAL BUREAU OF PATENT COOPERATION


(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/012940 A1

- (51) International Patent Classification⁷: B32B 35/00, B25B 3/00, B32B 17/10, B25B 11/00, B60J 1/20
- (74) Agent: DAVIES, Gregory, Mark; Urquhart-Dykes & Lord, Alexandra House, 1 Alexandra Road, Swansea SA1 5ED (GB).
- (21) International Application Number:
PCT/GB2003/003357
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 1 August 2003 (01.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0217922.4 2 August 2002 (02.08.2002) GB
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): CAR-GLASS LUXEMBOURG SARL-ZUG BRANCH [CH/CH]; Aegeristrasse 33, CH-6300 Zug (CH).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): DAVIES, Christopher [GB/GB]; Ty Coch Farm, Pembrey, Kidwelly, Carmarthenshire SA17 4TF (GB). BLOOMFIELD, Martin [GB/GB]; 96a Earling Park Gardens, London W5 4ET (GB). ZAHEDI, Mir, Saeed [GB/GB]; 10 Washington Road, London SW13 9BA (GB).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: GLASS REPAIR APPARATUS AND METHOD THEREFORE

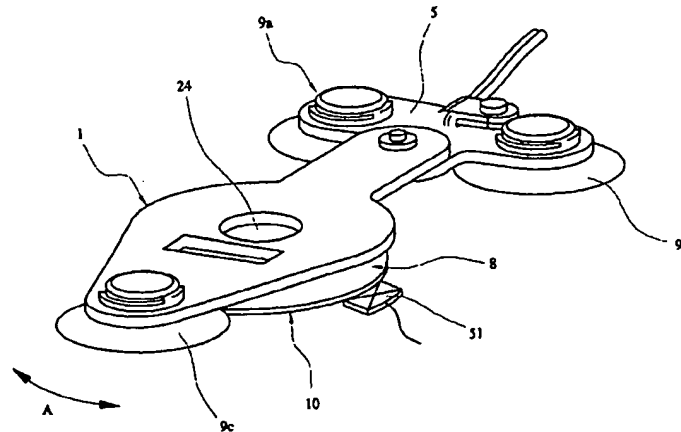

(57) Abstract: A windscreen heater is used for heating a windscreen prior to and/or during resin repair. The heated windscreen promotes the flow of resin to repair the windscreen. The device is mounted to the windscreen and has a port enabling viewing of a target zone of the windscreen. A heater element is positioned in the region of the port in order to effect heating of the windscreen.

WO 2004/012940 A1

GLASS REPAIR APPARATUS AND METHOD THEREFORE

5

The present invention relates to a windscreen heater device and particularly to such a device for use in a method of repairing a flaw (such as a crack or break) in a windscreen or other glazing panel.

10

The term windscreen should be interpreted broadly throughout as including vehicular or architectural glazing panels.

15 Frequently flaws such as small cracks or breaks in glazing panels (particularly vehicle windscreens) are repaired by means of infilling with a resin which when cured has optical and structural properties which mean that the optical and structural integrity of the glazing panel is
20 not compromised.

It has been found that in order to avoid propagation of the crack or break following repair, the infilling resin needs to completely fill the crack or break. In cold ambient
25 conditions flow of resin is inhibited and consequently it is sometimes difficult to ensure that the crack or break (flaw) is completely infilled. Known apparatus for repairing flaws (cracks or breaks) in glazing panels is disclosed, for example, in WO-A-01343373. The apparatus
30 disclosed in WO-A-01343373 operates to apply resin to the

-2-

flaw under an applied vacuum.

An improved technique and device has now been devised.

- 5 According to a first aspect, the present invention provides a windscreen heater device comprising:

a mounting arrangement for mounting the heater device relative to the windscreen;

10

a port enabling viewing of a target zone of the windscreen; and,

a heater element positioned in the region of the port.

15

Beneficially, the heater element is positioned peripherally of the port, preferably extending peripherally of the port.

It is preferred that the heating element comprises a heater
20 band extending peripherally about the port. Beneficially the heater element comprises an annular heater element and is preferably an electrical resistance heating element. In a preferred embodiment the heater element comprises an electrical annular silicone mat or pad heater. The heater
25 element is beneficially held in contact with the windscreen surface. The mounting means may be configured to ensure that the heating element is biased into to engagement with the windscreen. Spring means may be provided for this purpose or the inherent resilience of elements comprising
30 the mounting arrangement may ensure such biasing.

-3-

It is preferred that when mounted relative to the screen, the port and heater element can be moved relative to the windscreen. The port and heater elements are beneficially arranged substantially co-axially with one another. The

5 port may comprise an aperture through a support arm. In one embodiment a support body is provided between the annular heating element and the support arm, the support body also including an aperture comprising the port.

10 It is preferred that when mounted relative the screen, the port and heating element can be moved pivotally over the windscreen.

Beneficially the mounting arrangement includes three or

15 more points of mounting contact to the screen. The mounting means may include one or more sucker cups or other vacuum fixing arrangement.

It is preferred that the windscreen heating device

20 includes:

a first support element having mounting means for mounting to the windscreen; and,

25 a second support element pivotally connected to the first support element and carrying the port and heater element.

The second support element beneficially also includes

30 mounting means for mounting to the windscreen.

-4-

It is preferred that the device includes temperature indication means (such as a thermometer) to give an indication of the windscreen temperature.

- 5 According to a second aspect, there is provided a method of heating a windscreen using a windscreen heater device as herein defined, where the device is mounted to the underside (vehicle interior) surface of the windscreen.
- 10 According to a further aspect, the present invention provides a method of repairing a flaw (such as a crack or break) in a vehicle windscreen, wherein a vehicle windscreen heater device as herein defined is mounted adjacent the windscreen with the flaw visible through the
- 15 port. Heat is applied to the screen by the heater element and the flaw infilled with resin.

Beneficially the heater device is mounted to the underside (vehicle interior) surface of the windscreen. The flaw is

20 beneficially repaired with resin whilst heat is simultaneously applied by the heating element of the device mounted to the underside (vehicle interior) of the windscreen. Beneficially repair apparatus is mounted to the outside surface of the windscreen in the region of the

25 flaw, the outside mounted repair apparatus being operated to repair the flaw with resin whilst heat is simultaneously applied by the heating element of the heater device mounted to the underside (vehicle interior) surface of the windscreen. Preferred repair apparatus is capable of being

30 mounted on the windscreen, and is preferably arranged to

-5-

deliver resin under partial vacuum conditions, such as disclosed for example in WO-A-01343373.

5 The invention will now be further described in a specific embodiment, by way of example only and with reference to the accompanying drawings in which:

10 Figure 1 is a perspective view of a windscreen heater device in accordance with the invention; and

Figure 2 is an exploded perspective view of the device of Figure 1.

15 Referring to the drawings, the windscreen heater device comprises an annular neoprene body 8 to which is secured an annular silicone electrical resistance heating ring 10 (power rating 4W). A thermostat 12 carried by heater ring 10 is received within a complementary recess 13 provided in annular body 8.

20 The washer 8 and heating ring 10 subassembly is carried by a support arm 1 which at a proximal end has an aperture 15 for receiving a pin 7 and bush 2 pivot connection to swing plate 5 (through aperture 16).

25 The distal end of arm 1 includes an aperture 17 for receiving the stem portion 18c of a sucker cup 19c. Retaining clip 3c secures the sucker cup 9c.

30 The swing plate 5 includes corresponding apertures 19, 20

-6-

for receiving sucker cups 9a, 9b. Corresponding securing clips 3a, 3b are provided.

Heating ring 10 is provided with an axial aperture 21 which aligns with central aperture 22 of annular body 8 and also a corresponding co-aligned aperture 23 provided through arm 1. In the assembly apertures 21, 22 and 23 are co-aligned providing a viewing or observation port through the entire device.

10

As shown in the assembled configuration in Figure 1, the device can be retained on the surface of a vehicle windscreen by the sucker cups 9a, 9b, 9c. The device is typically situated on the underside of the vehicle windscreen with the viewing port 24 (defined by apertures 21, 22, 23) positioned under a subject crack, chip or break on the external surface of the vehicle windscreen. Sucker cup 9c may be released from the windscreen and the arm 1 pivoted in the direction of arrow A in Figure 1 completely out of the way of the zone of the crack or break in order to permit further more detailed observation of the break or crack.

With the device secured in position, the heating ring 10, is held in contact with the underside of the vehicle windscreen. The heating ring 10 is activated to provide an annular heating zone around the zone of the crack or break via the underside of the windscreen. A thermometer device 51 provides an indication of the windscreen temperature.

30

-7-

Whilst the heating device is in operation providing heat to the windscreen, on the obverse face of the windscreen (the exterior surface) the crack or break is repaired by infilling the crack with resin.

5

A resin applicator device (such as a vacuum application device) may be used to deliver resin to the crack on the exterior of the windscreen surface. An example of such apparatus is disclosed in WO-A-0134373. A feature of the present invention is the ability to heat the windscreen at the region of the crack or break whilst such crack repair apparatus is present on the exterior of the surface for infilling the crack or break with resin.

15 The heater of the present invention provides sufficient heat to ensure that the resin flow characteristics are optimised in order to ensure maximum infilling of the crack or break with resin.

20 The apparatus of the invention is particularly suited to use in cold ambient conditions where the screen temperature is such that resin flow inhibition would be likely to occur.

25 The heater device of the present invention has been shown to enable the screen temperature to be raised by 10°C - 25°C in two to five minutes at starting screen temperatures of -5°C to 10°C.

-8-

Claims:

1. A windscreen heater device comprising:
 - 5 a mounting arrangement for mounting the heater device relative to the windscreen;
 - a port enabling viewing of a target zone of the windscreen; and,
 - 10 a heater element positioned in the region of the port.
2. A windscreen heater device according to claim 1,
15 wherein the heater element extends peripherally of the port.
3. A windscreen heater device according to any preceding claim, wherein the heater element comprises an annular
20 heater element.
4. A windscreen heater device according to any preceding claim, wherein the heater element comprises an electrical resistance heating element.
25
5. A windscreen heater device according to any preceding claim, wherein the heater element is held in contact with the windscreen surface.
- 30 6. A windscreen heater device according to any preceding

-9-

claim, wherein, when mounted relative to the screen, the port and heater element can be moved relative to the windscreen.

- 5 7. A windscreen heating device according to claim 6, wherein, when mounted relative to the screen, the port and heater element can be moved pivotally over the windscreen.
- 10 8. A windscreen heating device according to any preceding claim, wherein the mounting includes three or more points of mounting to the screen.
- 15 9. A windscreen heating device according to any preceding claim, wherein the mounting means includes one or more sucker cups.
- 20 10. A windscreen heating device according to any preceding claim, including:
a first support element having mounting means for mounting to the windscreen; and,
a second support element pivotally connected to
25 the first support element and carrying the port and heater element.
- 30 11. A windscreen heater device according to claim 10, wherein the second support element includes mounting means for mounting to the windscreen.

-10-

12. A method of heating a windscreen using a windscreen heater device according to any preceding claim, wherein the device is mounted to the underside
5 (vehicle interior) surface of the windscreen.
13. A method of repairing a flaw in a vehicle windscreen, wherein a vehicle windscreen heater device according to any preceding claim is mounted adjacent the
10 windscreen with the flaw visible through the port, heat being applied to the screen by the heater element and the flaw infilled with resin.
14. A method according to claim 13, wherein the windscreen heater device is mounted to the underside (vehicle
15 interior) surface of the windscreen.
15. A method according to claim 13 or claim 14, wherein the flaw is repaired with resin whilst heat is
20 simultaneously applied by the heating element of the device.
16. A method according to any of claims 13 to 15, wherein the windscreen heater device is mounted to the
25 underside (vehicle interior) surface of the windscreen and repair apparatus is mounted to the outside surface of the windscreen in the region of the flaw, the outside mounted repair apparatus being operated to repair the flaw with resin whilst heat is
30 simultaneously applied by the heating element of the

-11-

device.

17. A device substantially as herein described with
reference to the accompanying drawings.

5

18. A method substantially as herein described with
reference to the accompanying drawings.

-1/2-

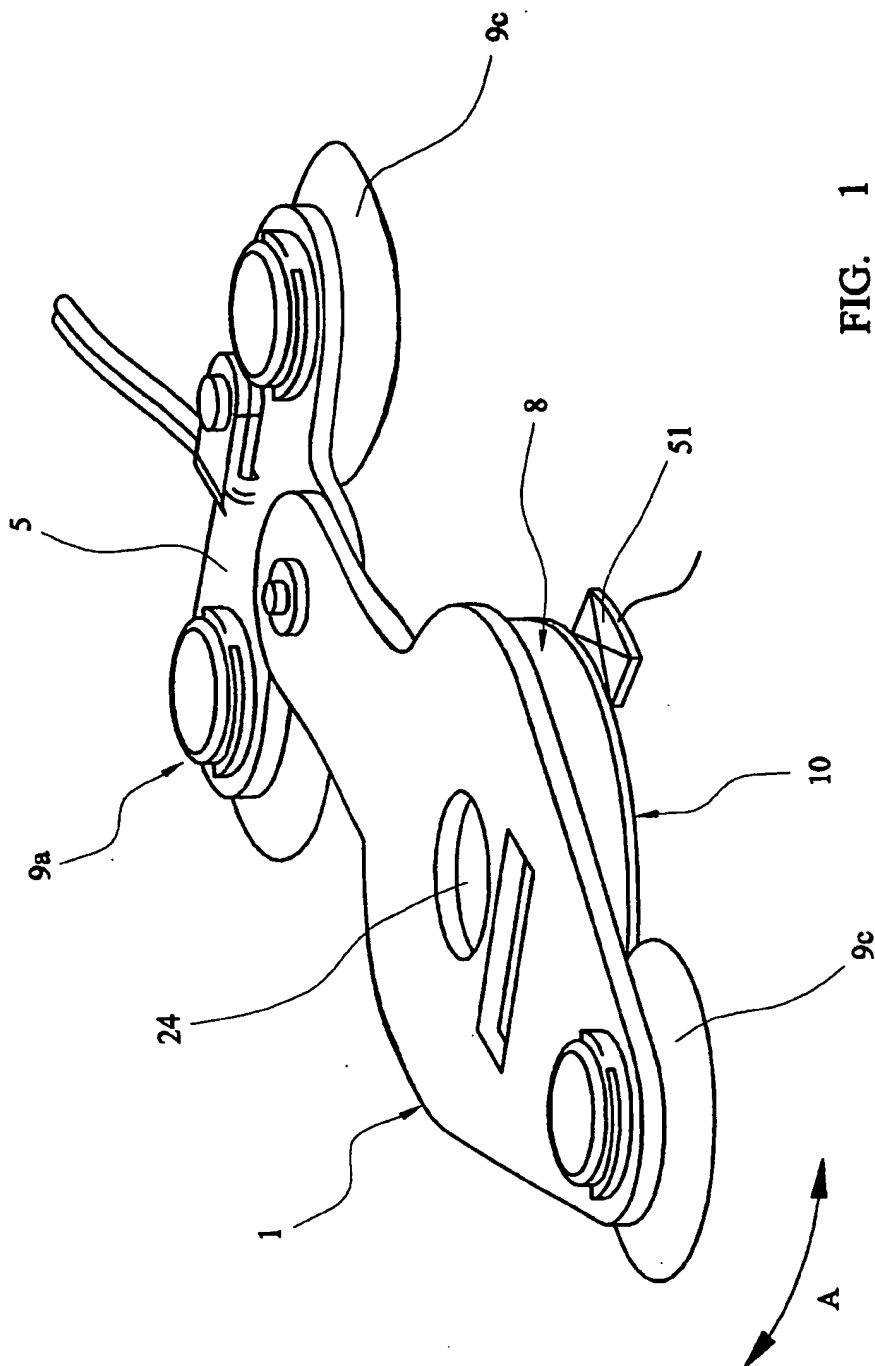


FIG. 1

SUBSTITUTE SHEET (RÙLE 26)

-2/2-

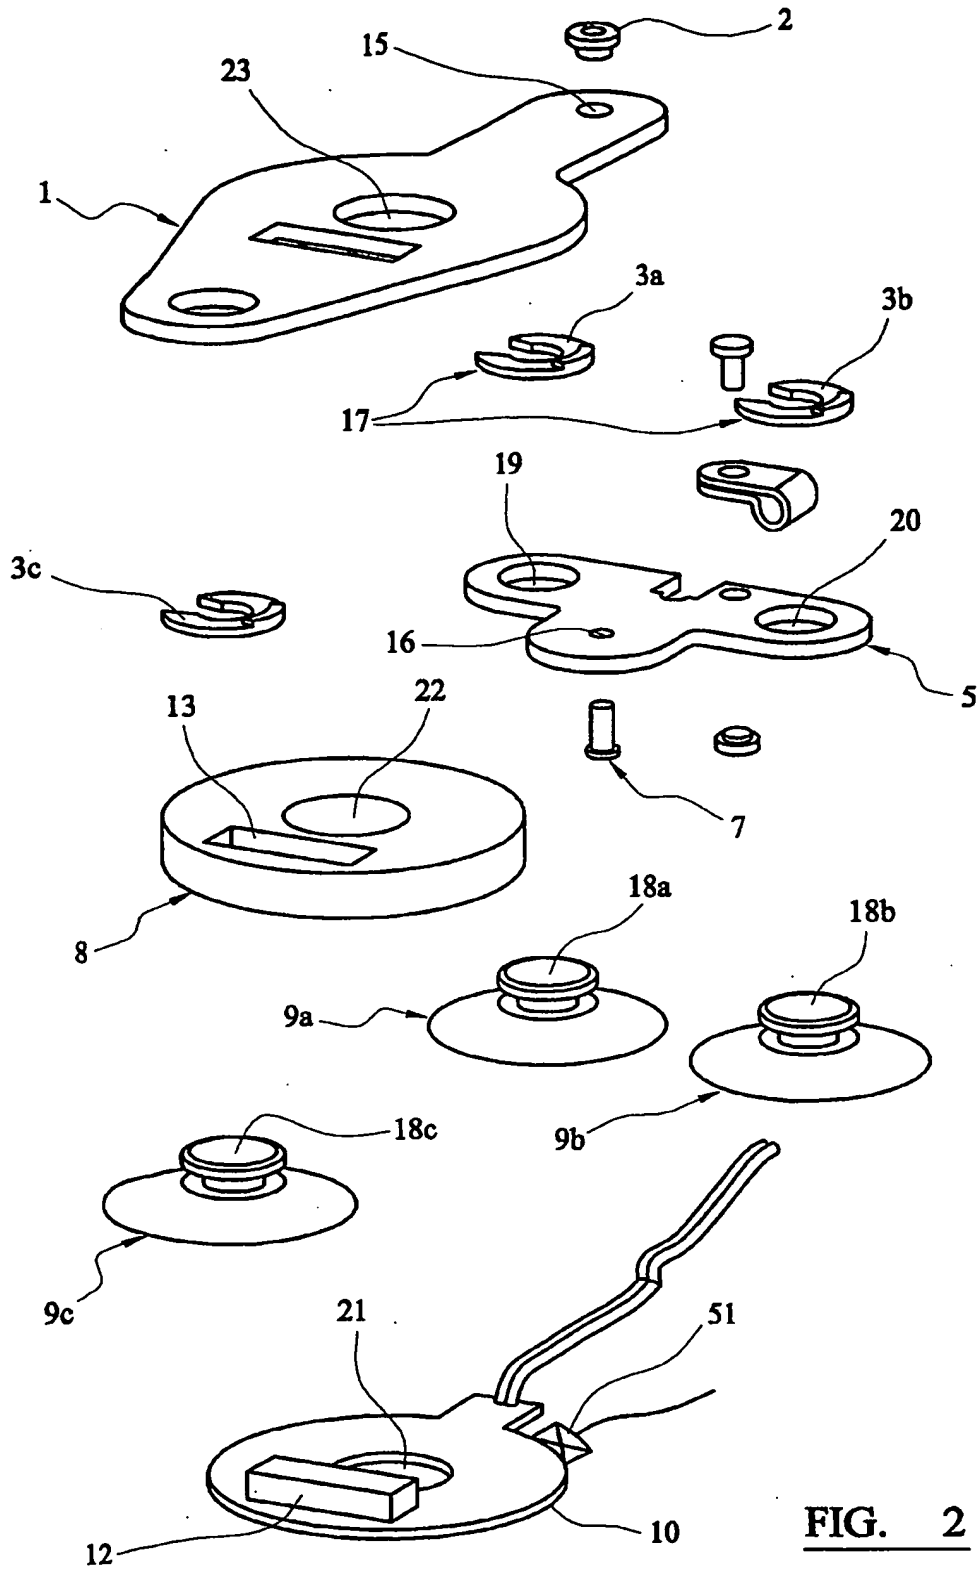


FIG. 2

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/GB 03/03357

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B32B35/00 B25B3/00 B32B17/10 B25B11/00 B60J1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B32B B25B B60J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 104 304 A (DOTSON JIMMY R) 14 April 1992 (1992-04-14) column 2, line 51 -column 4, line 9; figures 1-3	1, 2, 4-7, 9, 10, 12-15
X	US 4 047 863 A (KELCHNER HARLEY E ET AL) 13 September 1977 (1977-09-13) column 3, line 25 -column 6, line 19; figures 1, 2	1, 9, 13, 15, 16
A	EP 0 402 875 A (DOTSON JIMMY R) 19 December 1990 (1990-12-19) column 3, line 24 -column 6, line 28; figures 2, 3 -/-	1-4, 9, 12-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *G* document member of the same patent family

Date of the actual completion of the international search

20 October 2003

Date of mailing of the international search report

06/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Schmid, K

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Intern. # Application No

PCT/GB 03/03357

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 291 866 A (PETERSEN PAUL S) 29 September 1981 (1981-09-29) abstract; figure 2 -----	1,9,12, 13

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

page 2 of 2

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/GB 03/03357

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5104304	A	14-04-1992	NONE	
US 4047863	A	13-09-1977	NONE	
EP 0402875	A	19-12-1990	US 4954300 A AU 625038 B2 AU 5699190 A CA 2018842 A1 EP 0402875 A2	04-09-1990 25-06-1992 20-12-1990 14-12-1990 19-12-1990
US 4291866	A	29-09-1981	CA 1144531 A1	12-04-1983

Form PCT/ISA/210 (patent family annex) (July 1992)